

# ZXM6-NHLD120 Series

Znshinesolar 9BB **HALF-CELL** Light-Weight Double Glass Mono PV Module



120

**Mono** Poly Solutions



345W | 350W | 355W | 360W | 365W | 370W

Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-NHLD120 double glass modules by ZNSHINE SOLAR feature have both decorative and shading functions. They represent the perfect choice for BIPV and BAPV construction applications. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-NHLD120 double glass solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product.

**12 years product warranty/30 years output warranty**

**0.5% Annual Degradation over 30 years**

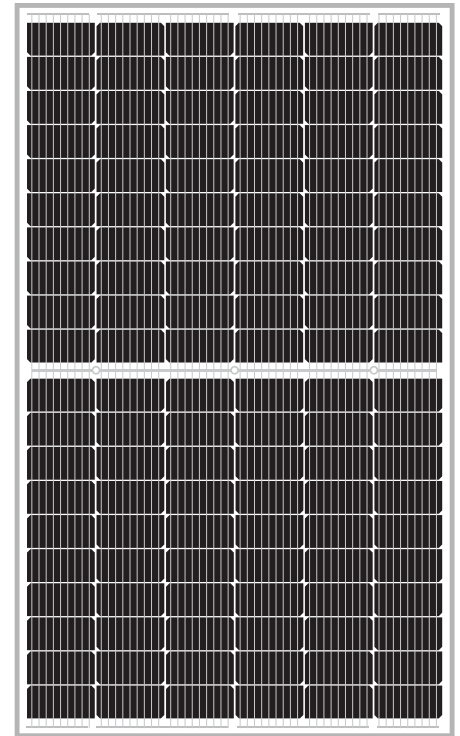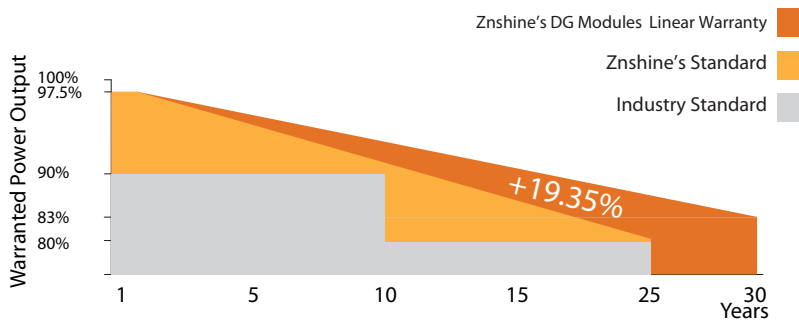

### More power output

Module RS decreases, FF (fill factor) increases, power gain is stable above 1.5%, and can be increased by 5~10W



### High Efficiency

Graphene coating can increase about 2W of the module efficiency by rising around 0.5% of the light transmission



### Anti PID

Limited power degradation of ZXM6-NHLD120 module caused by PID effect is guaranteed under strict testing condition for mass production



### Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



### Easy to install

The module is very light in weight so the installation is easier and transport costs are lower



### Graphene Coating

Graphene coating modules can increase power generation and self-cleaning, also can save maintenance cost



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

[www.znshinesolar.com](http://www.znshinesolar.com)

**ELECTRICAL PROPERTIES | STC\***

Module Type	ZXM6-NHLD120 -345/M	ZXM6-NHLD120 -350/M	ZXM6-NHLD120 -355/M	ZXM6-NHLD120 -360/M	ZXM6-NHLD120 -365/M	ZXM6-NHLD120 -370/M
Nominal Power Watt Pmax(W)	345	350	355	360	365	370
Power Output Tolerance Pmax(%)	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3
Maximum Power Voltage Vmp(V)	33.3	33.5	33.7	33.9	34.1	34.3
Maximum Power Current Imp(A)	10.37	10.45	10.54	10.62	10.71	10.79
Open Circuit Voltage Voc(V)	40.0	40.2	40.4	40.6	40.8	41.0
Short Circuit Current Isc(A)	10.94	11.03	11.12	11.21	11.30	11.39
Module Efficiency (%)	18.94	19.21	19.49	19.76	20.04	20.31

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

**ELECTRICAL PROPERTIES | NMOT\***

Maximum Power Pmax(W/p)	252.6	256.1	259.9	263.4	267.2	270.7
Maximum Power Voltage Vmpp(V)	30.8	31.0	31.2	31.3	31.5	31.7
Maximum Power Current Imp(A)	8.20	8.27	8.34	8.41	8.48	8.54
Open Circuit Voltage Voc(V)	37.0	37.2	37.4	37.6	37.8	38.0
Short Circuit Current Isc(A)	8.83	8.91	8.98	9.05	9.12	9.19

\*NMOT(Nominal module operating temperature):Irradiance 800W/m<sup>2</sup>,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

**TEMPERATURE RATINGS**

NMOT	44°C ±2°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

\*Do not connect Fuse in Combiner Box with two or more strings in parallel connection

**WORKING CONDITIONS**

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	20 A
Maximum load(snow/wind)	5400 Pa / 2400 Pa


**MECHANICAL DATA**

Solar cells	Mono 166×83mm
Cells orientation	120 (6×20)
Module dimension	1755×1038×30 mm(With Frame)
Weight	24 kg
Glass	2.0mm+2.0mm heat strengthened glass
Junction box	IP 68, 3 diodes
Cables	4 mm <sup>2</sup> ,350 mm
Connectors	MC4-compatible

**PACKAGING INFORMATION**

Packing Type	40' HQ
Piece/Box	36
Piece/Container	936

**DIMENSION OF THE PV MODULE (mm)**

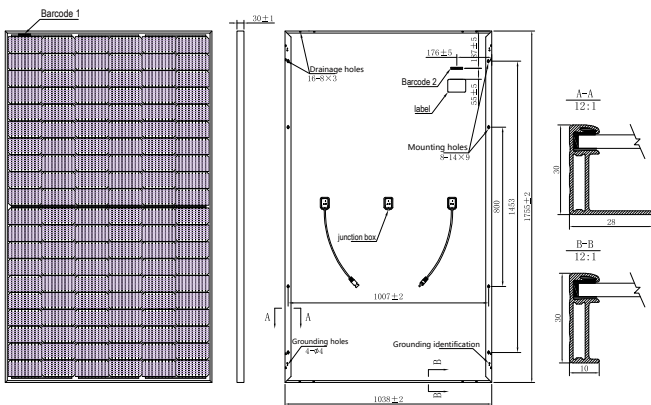

**I-V CURVES OF THE PV MODULE**

